


Hardy Floor Scales

Applications

PROCESS WEIGHING

- Inventory Management
- Batching & Blending
- Dispensing & Filling
- Check Weighing
- Shipping

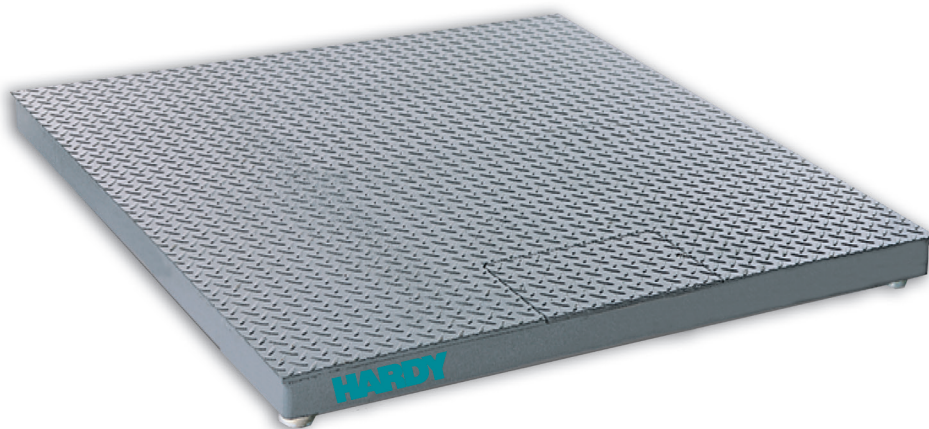

Features THE HARDY PROCESS TOOLBOX

The Hardy Process Toolbox is a set of productivity tools that delivers value across process weighing functions. Each tool saves time, increases accuracy, improves efficiency or reduces risk in your process weighing applications.



Electronic calibration without test weights



Weighing system monitoring and troubleshooting



HARDY ADVANTAGE® Load Cells

- Factory Matched, Stainless Steel with True Hermetic Seals; No Cornering

Hazardous Area Certification

- Class I, II, III, Div 1 and Div 2

Capacities Range from 1,000 to 10,000 lbs

Top Access Summing Card

100% End Loading

Hardy's accurate, rugged and reliable floor scales provide value and flexibility in size and capacity for use in a wide range of industrial weighing applications. Rated for 250,000 load cycles under normal loading conditions, they are built to last.*

HAZARDOUS AREA CERTIFICATION

Hardy Floor Scales are designed and built for industrial environments, including heavy washdown and hazardous areas, with Class I, II, III, Div. 1 & 2 certification. Incredibly easy to install and use; just level the deck, attach the included twenty-foot cable, calibrate (if a C2® compatible instrument, set your reference), verify and begin weighing.

Available in eight sizes from 30 x 30 inch to 72 x 96 inches in 1, 2.5, 5, and 10 klb capacities, Hardy floor scales have two threaded holes in the decks for attaching eyebolts to facilitate installation and cleaning.

C2® ELECTRONIC CALIBRATION

Used with a Hardy weight processor or controller, C2 enables fast, accurate, electronic calibration without test weights. The C2 system reduces downtime for installation or repairs and eliminates test weight related injuries.

INTEGRATED TECHNICIAN®

Each scale has built-in INTEGRATED TECHNICIAN (IT) circuitry. Coupled with a Hardy controller or instrument, the scale provides diagnostic and troubleshooting tools that read individual weights and voltages to aid you in isolating problems and ensure the integrity of your scale system.

SERVICE BY DESIGN

Along with C2 and INTEGRATED TECHNICIAN, all Hardy floor scales feature a top access plate for quick and easy access to the NEMA 4X summing box containing the Hardy 6011 Summing Card, ensuring that general maintenance is easier and more time-efficient.

HERMETICALLY SEALED LOAD SENSORS

The heart of any scale is the load sensors. All Hardy floor scales come standard with four matched Hardy ADVANTAGE® stainless steel, true hermetically-sealed sensors — sealed at both the gauging area and cable entry for long life. All are matched and calibrated for mV/V and mV/V/ohm. This eliminates the need for corner adjustment and potentiometers in the junction box, allowing a sensor to be replaced without calibration. Instead of the typical threaded hole into which the load cell foot is attached, the ADVANTAGE sensors use a blind hole technique ensuring the load is applied at a precise location to provide an accurate reading, weight after weight.

RUGGED, LOW PROFILE DESIGN

With a deck height of only 4.0 inches and 100% end loading, these floor scales enable easy, any-side access and maneuvering of all types of load handling equipment onto the scale.

Each scale features a field-proven, rugged structural rib design with 1/4 inch thick smooth or diamond plate deck that can withstand overloads of up to 100% of its capacity. Durable rubber encapsulated feet provide easy height adjustment.

*Contact Hardy for more information

COMPONENTS TO COMPLETE YOUR HARDY SYSTEM

Hardy Bench Scales, Floor Scales and Load Points

Hardy carries a wide variety of strain gauge load points and scale mounts to accommodate your application requirements.

*ADVANTAGE Series
with C2 Calibration*



*Bench & Floor
Scales*



Weighing Instruments Dedicated to Your Applications

Controllers, Weigh Modules, Weight
Processors & Transmitters

*Allen-Bradley® Compatible
Plug-in Weigh Scale Modules*



*HI 3000 & HI 4000
Controllers and
HI 6000 Series Weight
Processors*



SPECIFICATIONS

Platform

- 0.25" inch thick smooth or safety tread deck

Deck Height

- 4.0 inches (10.2 cm) (adjustable 0.2" or 5 mm)

Overload Capacity

- 200% of rated scale capacity

End Loading

- 100% of rated scale capacity

Cable Length

- Platform to Instrument - 20 feet
(for longer cable lengths, contact the Factory)

Construction

- 304 SS Stainless Steel
- Painted Carbon Steel with Two-part UV resistant Polyurethane - 2 to 4 mil top coat

Load Sensors

- C2® stainless steel
- hermetic seal
- blind hole loading

Junction Box

- NEMA 4X

Power Rating

- 5 VDC, Class 2 source, max. 50 mA

Hardy 6011IT Summing Card

- 4 Individual load sensor terminal blocks with integrated cable glands
- INTEGRATED TECHNICIAN® circuitry
- For Class I and II, Division 1 Hazardous (Classified) Locations, and Class 1, Zone 0 and 2 Groups IIC, Zone 20 and 22 Groups IIIC, power must be supplied through intrinsically safe barriers per control drawing 0594-0010

Scale Excitation

- 5vdc +/-5%

Optional Eye Bolts

- 1/2 - 13 x 1-1/2", 2-1/4" diameter eye

Duty Cycle

- +250,000 load cycles under normal loading conditions*

*Contact Hardy for further information

Accuracy

- Combined Error: 0.02%
- Repeatability: 0.01%

Certifications

- UL, CUL, CE • RoHS and REACH Compliant
- Hazardous Areas: Class I, Division 1, Groups A, B, C, D, T4; Zone 0, Group IIC, T4; Division 2, Groups A, B, C, D, T5
- Class II, Division 1, Groups E, F, G, T4; Zone 20, Group IIIC; Division 2, Groups F, G, T5
- Class III, Division 1, T4; Division 2, T5

Warranty

- Two year limited warranty

ORDERING OPTIONS

- PS Painted Steel Platform Top
- SS Stainless Steel Platform Top
- S Smooth Platform Top
- T Tread Plate Platform Top

All information within is subject to change without notice. C2, INTEGRATED TECHNICIAN and ADVANTAGE are registered trademarks of Hardy Process Solutions, Inc.. Allen-Bradley, CompactLogix, MicroLogix and Encompass are trademarks of Rockwell Automation, Inc. All other trademarks or registered trademarks are the property of their respective owners.

STANDARD SIZES AND CAPACITIES

SIZE (feet/cm)	CAPACITY (lb/kg)	HEIGHT (in/cm)	SHIP (lb/kg)
30" x 30" / 76 x 76	1000/500	3.375"/8.6 cm	200/91
	2500/1000	3.375"/8.6 cm	200/91
	5000/2500	3.375"/8.6 cm	200/91
3' x 3' / 91 x 91	1000/500	3.375"/8.6 cm	250/113
	2500/1250	3.375"/8.6 cm	250/113
4' x 4' / 122 x 122	2500/1250	3.375"/8.6 cm	405/184
	5000/2250	3.375"/8.6 cm	405/184
	10,000/4500	3.375"/8.6 cm	405/184
4' x 5' / 122 x 152	5000/2250	3.375"/8.6 cm	500/227
	10,000/4500	3.375"/8.6 cm	500/227
4' x 6' / 122 x 183	5000/2250	3.375"/8.6 cm	600/272
	10,000/4500	3.375"/8.6 cm	600/272
5' x 5' / 152 x 152	5000/2250	3.375"/8.6 cm	650/295
	10,000/4500	3.375"/8.6 cm	650/295
5' x 7' / 152 x 213	5000/2250	3.375"/8.6 cm	900/408
	10,000/4500	3.375"/8.6 cm	900/408
6' x 8' / 183 x 244	10,000/4500	3.375"/8.6 cm	1150/522

HARDY FLOORSCALE ACCESSORIES

Enables you to easily configure a solution to meet your individual applications!


- Ramps
- Pit Frames
- Bumper Guards
- Bolt Down Plates
- Instrument pedestal
- Portability Frames



Instrument Pedestal
HIFS1-48-SS




Pit Frames
HIFSPF Series



Access Ramps
HIFSR Series



Portability Frames
HIFSPK Series



Bumper Guards
HIFSBG Series

Also Available: Lift Deck Scales

HARDY
PROCESS SOLUTIONS
Measurement • Automation • Productivity

Hardy Process Solutions

9440 Carroll Park Dr.
San Diego, CA 92121
tel. +1-858-278-2900
tel. 800-821-5831
fax +1-858-278-6700
www.hardysolutions.com
hardyinfo@hardysolutions.com



HAR FLR 042020
0400-0024-01D

www.hardysolutions.com • 800.821.5831